


Cub Cadet[®]

Garden Tractors

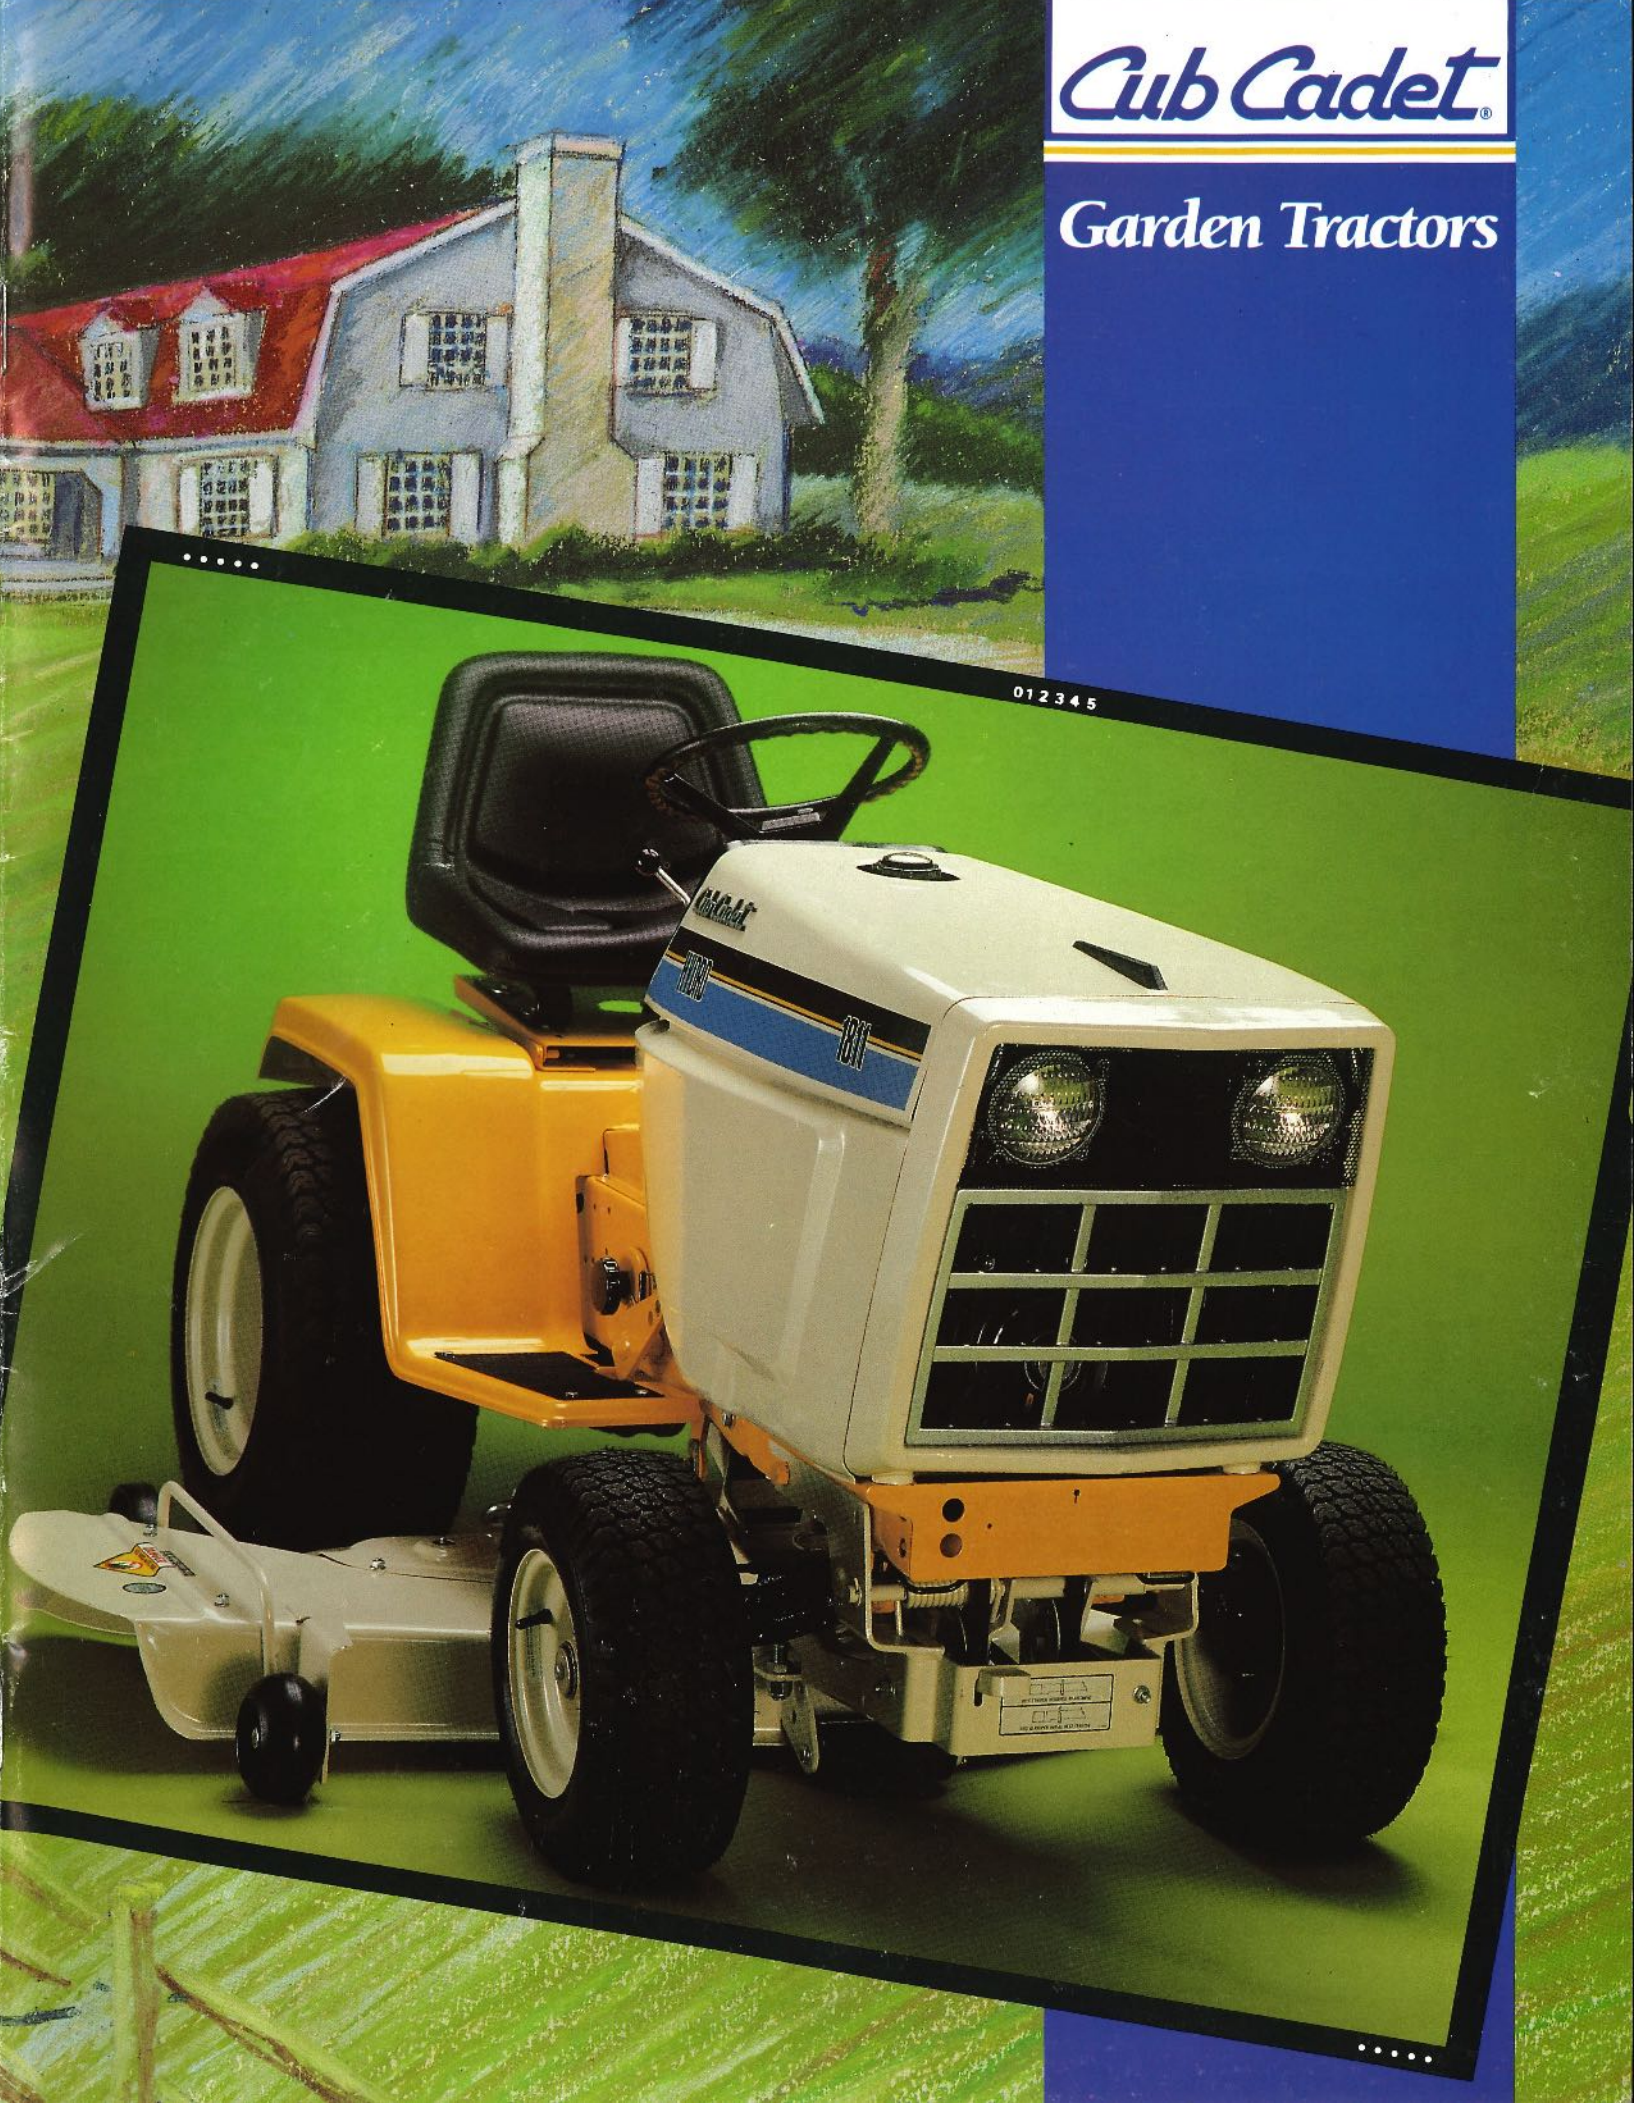

Cub Cadet®

The tough tractor that's right for you.

Whether you're a homeowner, a weekend farmer, or a grounds care professional choosing a garden tractor, there's really only one decision to make — which tough Cub Cadet tractor is right for you.

Every Cub Cadet garden tractor is built tough. Tough is a full-length, twin-channel steel frame. Tough is a cast-iron front axle. Tough is a 2-year limited warranty. Built tough to handle your toughest jobs.

And for 1988, Cub Cadet has designed a product line that features a garden tractor for every individual and every size job. With a wide variety of optional attachments, you can fill, plow, clear snow, mow, tow, cultivate and more for year-round versatility.

12 H.P. GARDEN TRACTOR SERIES For Average Size Suburban Lawns

Buying your first tractor? Have an average size lot to mow? A small garden to tend? If you want more than a lawn tractor but really don't need a big garden tractor, one of these affordable Cub Cadets will fit your needs perfectly. Models 1204, 1210 and 1211 are all powered by Kohler's dependable single-cylinder, cast-iron 12 H.P. engine. With a choice of three models, you can select 4-speed or direct hydrostatic drive with manual or hydraulic lift.

18 H.P. GARDEN TRACTOR SERIES For Average To Large Size Lawns

These are America's most popular size garden tractors. And with good reason. Models 1810, 1811,

1812 and 1806 step up to a more powerful, smooth running 18 H.P. twin-cylinder Kohler engine to increase your yard care capabilities and decrease the time you spend working in your yard. Once again, with a direct drive shaft, you have a choice of 6-speed or hydrostatic drive with manual or hydraulic lift.

SUPER GARDEN TRACTOR SERIES For Large Country Properties, Estates, And Professional Grounds Maintenance

Cub Cadet Super Garden Tractors feature a larger 78.5" frame and bigger tires for the really tough jobs. With standard features like *power steering* and hydrostatic drive, you get farm-tractor power in a garden tractor that's comfortable and easy to operate.

For mowing large areas, towing heavy loads and lots of gardening, models 1872 and 2072 feature 18 and 20 H.P. twin-cylinder, air-cooled Kohler engines.

If lawn care is your business, Cub Cadet's model 1572 diesel is your tractor. Its three-cylinder liquid-cooled engine gives you power that's quieter, smoother and longer lasting.

TAKE A LOOK

Take an inside look at why Cub Cadet garden tractors have been America's choice since 1961. You'll find that a Cub Cadet, backed by service professionals and a two-year limited warranty, is one tough tractor that's right for you.



Ask your Cub Cadet dealer for brochures on our lawn tractors and rear engine riders, too.

Cub Cadet

One Tough Tractor



Here's what makes us tough.

High-Back Cushioned Seat
Easily adjusts for operator's comfort. Deeply ventilated for cool seating on hot summer days.

Seat Safety Switch
Automatically disengages PTO when operator dismounts.

Fender
One piece, all steel.

Heavy-Duty Rear Axle
Hydrostatic tractors feature a cast-iron differential housing. Dipstick to check oil level. Forged steel ring and pinion gear. 1" forged steel axle. Steel cut differential gears. Ball bearings on pinion shaft. Tapered roller bearings on differential carriers. Die cast aluminum alloy case and axle carriers.

High Flotation Tires
Provide excellent traction. Agricultural type tire optional.

Dual Disc Brakes
Provide safe, even control when stopping. (On all models except 1204.) Dual pedal control turning brakes on Models 1572, 1872 and 2072.

Hydrostatic Transmission
(Sundstrand)
More than 20 years of proven performance on Cub Cadet garden tractors. Provides infinite ground speed up to 7.5 mph. (On all models except 1204 and 1806).


Drive Shaft
From engine to transmission. (Except model 1204).

Hydrostatic Lever
Conveniently mounted on dash.

Dashboard
Full instrumentation includes electric power take-off switch, hour meter and volt meter.

Hydraulic Lever
Hydraulically lifts the mowing deck and features a memory device for uniform cutting height (optional).

Floating Mower Deck
Features four adjustable anti-scalp gauge wheels and one roller with memory lift. Mower spindles feature grease fittings.

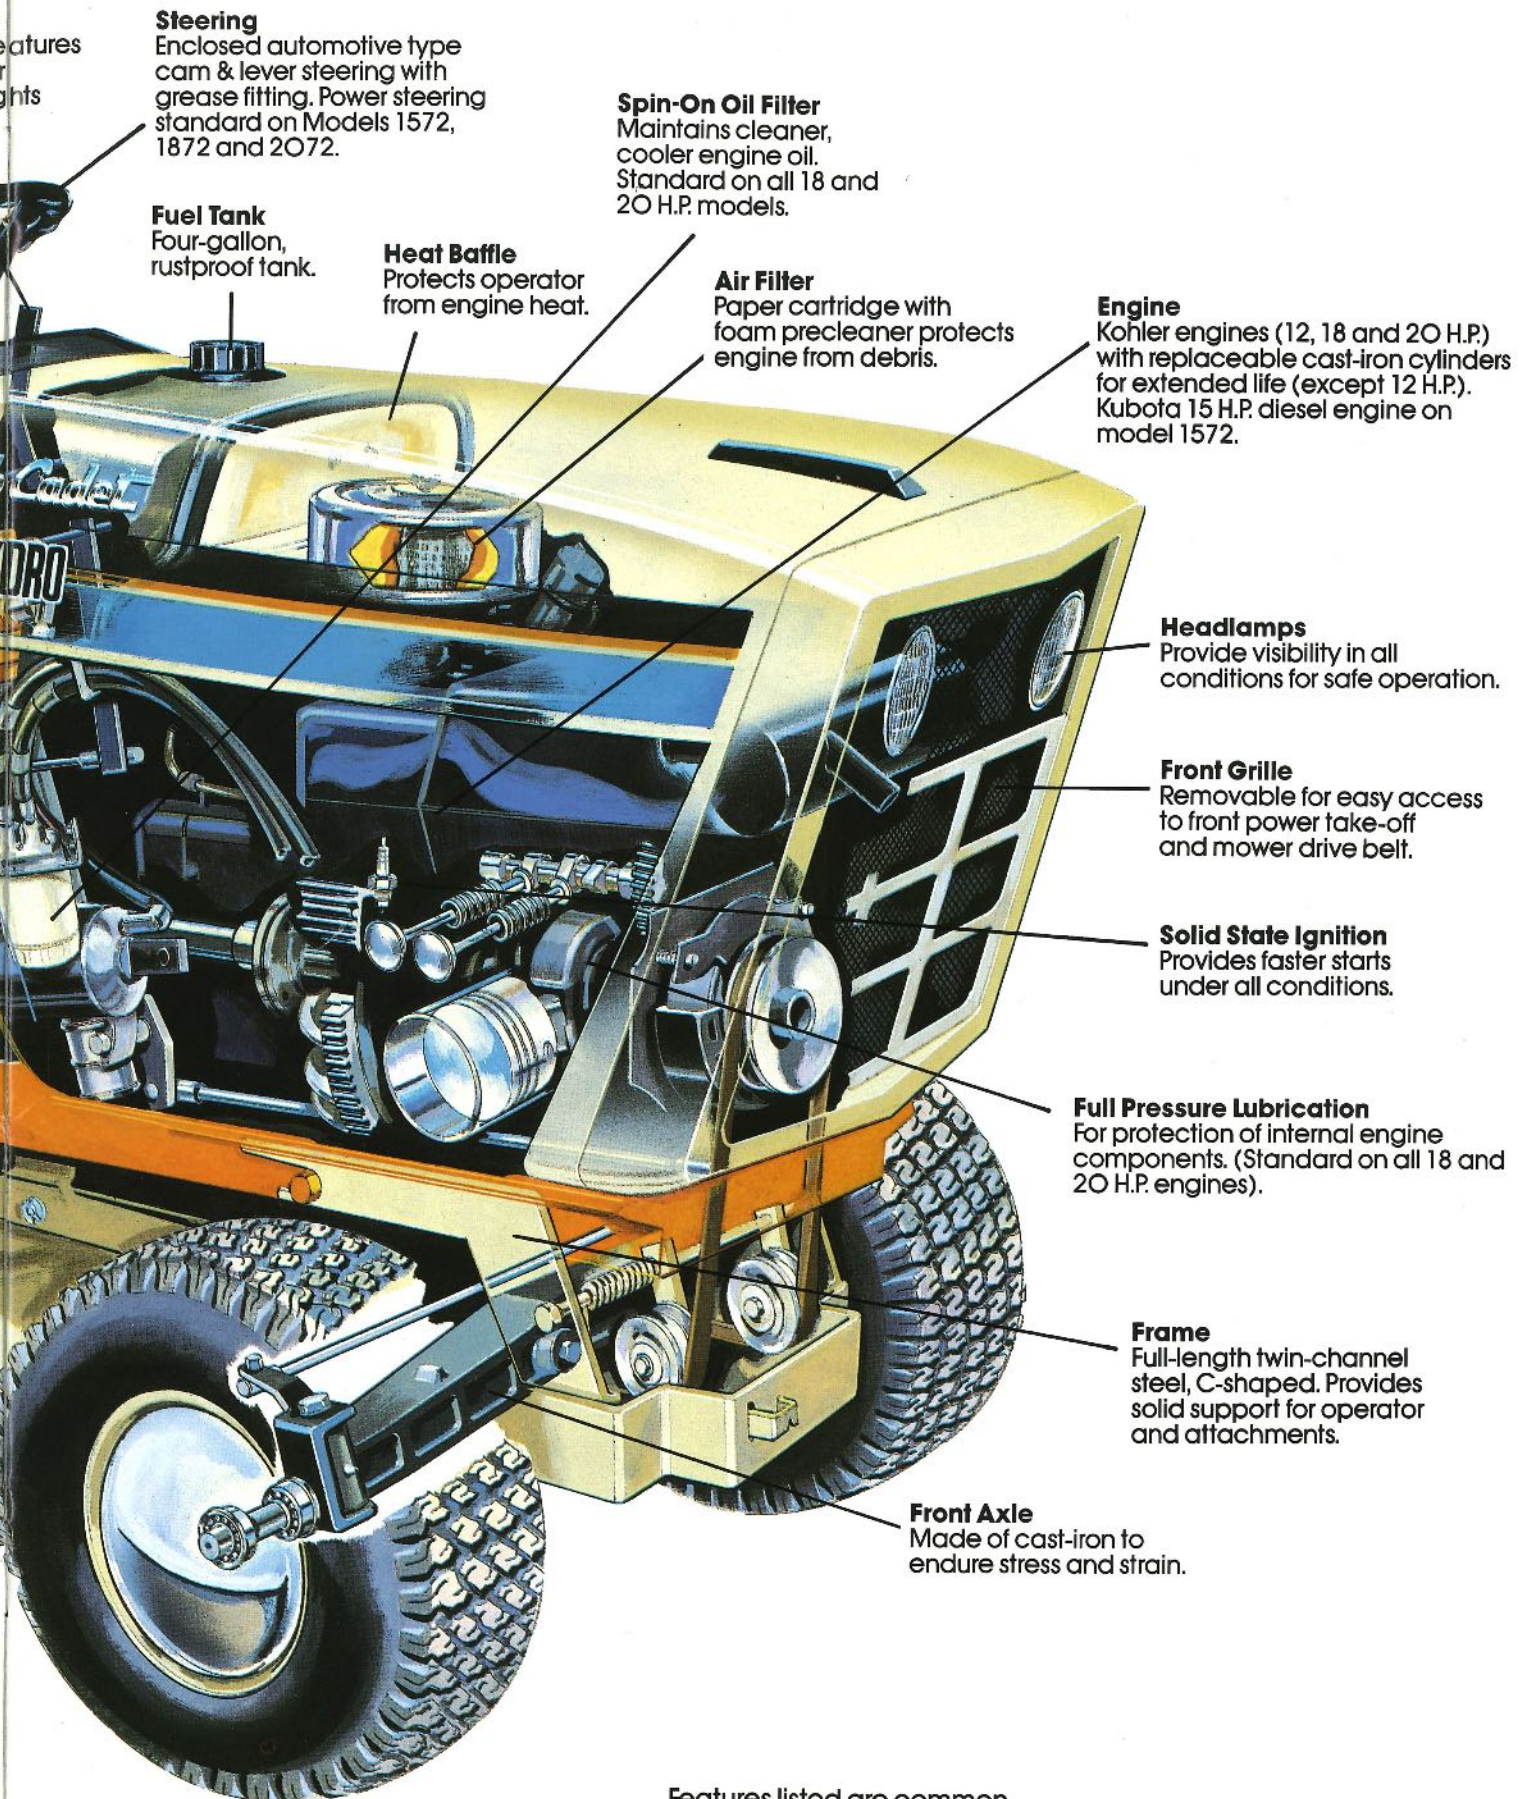

12 H.P. GARDEN TRACTOR SERIES



Powered by Kohler, the finest air-cooled engines in the industry, these tractors are tough enough to handle your yard work all year long.

When you need more than a lawn tractor, Cub Cadet models 12O4, 121O and 1211 for average size yards are versatile, affordable answers.

You'll get the most from your investment with a full range of lawn and garden attachments for all kinds of chores, for every season of the year. Just a sampling of the optional

attachments available include a snow blade, snowthrower, tiller, trailer and 38,"44,"or 50" mowing decks.


Dependable Kohler engines power all three models. These 12 H.P. single-cylinder engines are designed for durability. They feature all cast-iron blocks, bearings at both ends of the crankshaft for strength and dual

element air cleaners to keep engines running cleaner and longer.

Models 121O and 1211 feature easy, hydrostatic drive, while model 12O4 has a reliable Peerless 4-speed transaxle transmission. You also have a choice of lifts: hydraulic on model 1211, manual on models 12O4 and 121O.



Cub Cadet's 12 H.P. Kohler engine features a solid state inductive electronic ignition which produces a stronger spark for easy, cold-weather starting. Newly designed pistons control oil use, reduce vibration and noise. Balance gears minimize vibration,

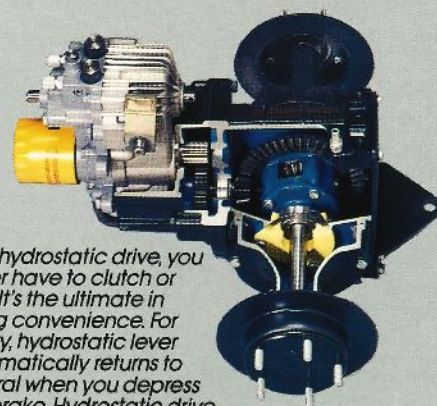

With hydrostatic drive, you never have to clutch or shift. It's the ultimate in riding convenience. For safety, hydrostatic lever automatically returns to neutral when you depress the brake. Hydrostatic drive is a direct drive shaft from the engine to the heavy-duty transmission.

18 H.P. GARDEN TRACTOR SERIES



Designed for medium to large size lawns, these powerful tractors offer a choice of features and a full range of yard work capabilities.


Cub Cadet's most popular tractor series offers four 18 H.P. models with a variety of options to match the tractor to your needs.

Model 1806 with 6-speed direct drive and model 1810 with hydrostatic drive are favorites for quickly mowing large areas of grass. Choose from optional 38", 44" or 50" mowing decks to cut an acre of grass in 45 to 75 minutes.* Both models come standard with manual lift.

Hydrostatic model 1811 adds the convenience of hydraulic lift for effortless raising and lowering of attachments. And model 1812 goes even further with dual front hydraulic outlets for angling a front snow blade.

With all the muscle in these 18 H.P. Kohler-powered tractors, you'll also want to check into the full range of yard work capabilities available with Cub Cadet's large selection of optional attachments. From tilling your garden to clearing snow, they'll help you get the most out of your tractor every season of the year.

*Approximate mowing speed for flat lawn with no obstacles. Varies with deck size.

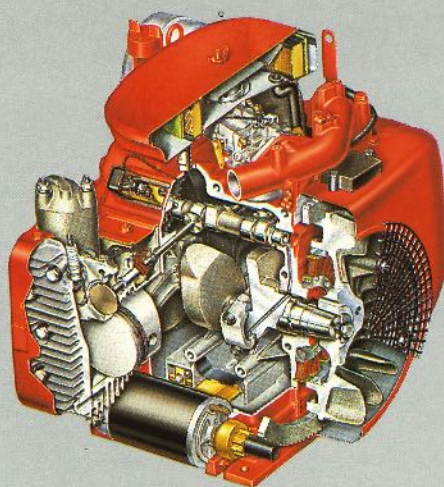

Cub Cadet's 18 H.P. garden tractors feature Kohler's high-performance twin-cylinder engine which delivers high torque levels at lower rpm. Solid state inductive electronic ignition produces a stronger spark for easy starts in cold weather. And the standard spin-on oil filter maintains a cleaner, cooler engine. Kohler's advanced design also reduces operating temperatures, oil use, vibration and noise.



Optional 38", 44" or 50" mowing decks are available on models 1204, 1210, 1211, 1806, 1810 and 1811.

SUPER GARDEN TRACTOR SERIES



Here's a tough series of large frame garden tractors with the heavy-duty power and performance required for your biggest jobs.

Now the tough gets tougher. Cub Cadet's Super Garden Tractor Series consists of three models that work like farm tractors to handle heavy chores on large properties quickly and easily.

They're larger than other garden tractors - with a 78.5" full-length twin-channel steel frame, 18" x 8½" front tires, and 26" x 12" high flotation turf tread rear tires.

They're also more powerful - model 1872 with an 18 H.P. twin-cylinder engine, model 2072 with a 20 H.P. twin-cylinder engine, and model 1572 with a 15 H.P. three-cylinder diesel engine (great for professional use).

But these three models are even better than farm tractors, because they represent the ultimate combination of power and comfort. They are operator-oriented machines with convenient features like no-clutch, no-shift hydrostatic direct drive and hydraulic lifts with dual front outlets. *Standard power steering makes turning absolutely effortless, and an ad-*

justable, high-back cushioned seat keeps you comfortable on long rides.

In addition to the optional accessories available for all Cub Cadet garden tractors, special attachments available just for the Super Garden Tractor Series include a 54" snow blade, 40" tiller, 42" PTO rotary cutter, and 50" and 60" mowing decks.

For professional results on large properties, your choice is clear. Cub Cadet Super Garden Tractors are the tough tractors that get the job done.




Built rugged for heavy-duty tilling, this optional Bush Hog tiller features a wide 40" working width with 24 tines for excellent tilling and mulching. Available for models 1572, 1872 or 2072.



The optional Bush Hog rotary cut mower gives you high-speed cutting capability for mowing through large fields. It features a wide cutting width of 42" and can be adjusted from 1" to 6" cutting heights. Available for models 1572, 1872 or 2072.

Cub Cadet's "Quick Attach" System Makes Attachments Easy To Attach and Remove ... No Tools Required.

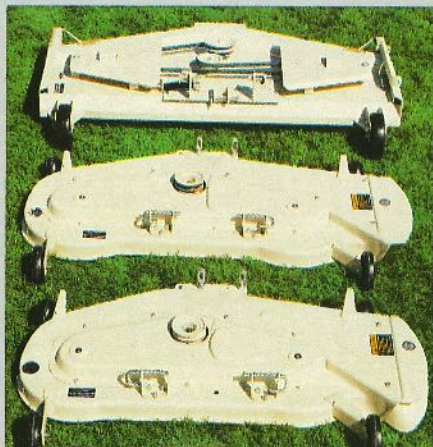

MOWING DECKS

60" Model 190374; 44" Model 190358; 50" Model 190359 (38" Model 190357 not shown)

These semi-floating decks are designed for a level, even cut over bumps and dips. Four anti-scalp wheels on the 44" and 50" decks work with four-point suspension to prevent scalping. Decks easily attach and remove – no tools required.



SNOW BLADES

42" Model 190375; 54" Model 190376

Clears snow, grades soil and performs other chores for year-round use. Spring-loaded trip and return protects blade and tractor. For best traction, tire chains and wheel weights are recommended. Blades easily attach and remove – no tools required.



SNOWTHROWER

45" Model 190450

High-speed, two stage design cuts through drifts and throws snow up to 40 feet away. Chute direction is controlled from operator's seat. 20" opening height, 15"-diameter auger, and 45" clearing width. Adjustable skid shoes and drift cutters are included.



BUSH HOG TILLER

40" Model 190442

Heavy-duty, 10-gauge steel tiller features 40" working width and 7" tilling depth. 24 tines provide excellent tilling and mulching. Includes 6 flanges, 2000 RPM drive, rotor RPM 227. Overall width of tiller with skids is 44". Mount with Category "O" 3-point hitch. (Models 1572, 1872 and 2072 only.)



TRAILER

10 Cu. Ft. Model 190368

Haul any load up to 1200 lbs. in trailer's heavy-gauge, all-steel body. Tailgate easily removes for oversize loads. Dumps from operator's seat with convenient release lever. Also includes 16" pneumatic tires. (17 cu. ft. heavy-duty trailer also available.)



BUSH HOG ROTARY CUT MOWER

42" Model 190349

For quick, rough cutting in large areas this 12-gauge steel, 42" rotary cut mower has a tip speed of 16,170 FPM. Features 1"-6" cutting heights and spring washer drive protection. Size 1U-joint driveline with 2000 RPM PTO. Overall size with tail wheels is 45" x 64". (Models 1572, 1872 and 2072.)



ROTARY TILLER

38" 8 H.P. Model 190400

Powered by an 8 H.P. Briggs & Stratton engine, this tiller breaks up soil, blends in fertilizer and cultivates. Tine engagement and tilling depth adjusts from operator's position. The twenty-four 14"-diameter tines prepare a seedbed in one pass. This model mounts to any ground engaging tractor equipped with sleeve or Category "O" 3-point hitch.



CATEGORY "O" 3-POINT HITCH

Models 190388, 190389, 190383

This hitch mounts a number of attachments to Cub Cadet garden tractors. Model 190388 hitch includes heavy-duty spring assist for mechanical lift tractors.

1204	1210	1211	1806	1810	1811	1812	1572	1872	2072
------	------	------	------	------	------	------	------	------	------

FRONT MOUNTED ATTACHMENTS

190375 Snow Blade 42"	■	■	■	■	■	■			
190376 Snow Blade 54"	■	■	■	■	■	■			
190377 Adapting Pkg. for 42" & 54" Blade	■	■	■	■	■	■			
190401 Snow Blade 54"							■	■	■
190378 Hydraulic Blade Angle Kit						■	■	■	■
190450 Snowthrower 45"	■	■	■	■	■	■	■	■	■
190448 Snowthrower Adapt. Kit							■	■	■
190449 Manual Lift Helper Kit	■	■		■	■				

CENTER MOUNTED ATTACHMENTS

190357 38" Mowing Deck	■	■	■	■	■	■			
190358 44" Mowing Deck	■	■	■	■	■	■			
190359 50" Mowing Deck	■	■	■	■	■	■	■	■	■
190360 Adapt Kit 50" Deck	■	■	■	■	■	■			
190361 Adapt Kit 50" Deck							■	■	■
190374 60" Mowing Deck							■	■	■
190385 Adapt Kit 60" Deck							■	■	■

REAR MOUNTED ATTACHMENTS

190380 Sleeve Hitch	■								
190388 3 Pt. Cat. "O" Hitch		■		■	■				
190389 3 Pt. Cat. "O" Hitch			■			■	■		
190383 3 Pt. Cat. "O" Hitch							■	■	■
190433 Rear PTO Kit							■	■	■
190400 8 H.P. Tiller	■	■	■	■	■	■	■	■	■
190442 40" PTO Driven Tiller							■	■	■
190349 42" PTO Rotary Cutter							■	■	■
190924 "A" Frame Adapter (3 pt. to sleeve)		■	■	■	■	■	■	■	■
190978 10" Moldboard Plow (sleeve hitch)	■	■	■	■	■	■	■	■	■
190980 Single Disc Harrow (sleeve hitch)	■	■	■	■	■	■	■	■	■
190984 Row Crop Cultivator (sleeve hitch)	■	■	■	■	■	■	■	■	■
190920 12" Moldboard Plow (3 pt. hitch)		■	■	■	■	■	■	■	■
190921 Row Crop Cultivator (3 pt. hitch)		■	■	■	■	■	■	■	■
190922 Spring Cultivator (3 pt. hitch)		■	■	■	■	■	■	■	■
190901 Core Aerator	■	■	■	■	■	■	■	■	■

MISCELLANEOUS ATTACHMENTS

190370 75 Lbs. Each Rear Wheel Weights	■	■	■	■	■	■	■	■	■
190409 23" Agricultural Tread Tires/Rims (2)	■	■	■	■	■	■			
190410 26" Agricultural Tread Tires/Rims (2)							■	■	■

TRAILING ATTACHMENTS

190482 Lawn Sweeper 32"	■	■	■	■	■	■	■	■	■
190483 Lawn Sweeper 38"	■	■	■	■	■	■	■	■	■
190438 Broadcast Spreader - Pull Behind	■	■	■	■	■	■	■	■	■
190653 10 Cu. Ft. Trailer 750 Lb. Capacity	■	■	■	■	■	■	■	■	■
190368 10 Cu. Ft. Trailer 1200 Lb. Capacity	■	■	■	■	■	■	■	■	■
190425 10 Cu. Ft. Trailer 1500 Lb. Capacity	■	■	■	■	■	■	■	■	■
190655 Spike Aerator	■	■	■	■	■	■	■	■	■
190484 Lawn Roller 36" x 24"	■	■	■	■	■	■	■	■	■

SPECIFICATIONS

MODEL	1572	1872	2072
POWER			
Make	Kubota 15 H.P., 3 cylinder	Kohler 18 H.P., 2 cylinder	Onan 20 H.P., 2 cylinder
Cooling	Liquid	Air	
Lubrication	Automotive pump with oil filter		
Block	Cast iron with removable liners	Cast iron cylinders	Aluminum with cast iron liners
Fuel	No. 2 diesel fuel	Regular or unleaded gasoline	
POWER TRAIN			
Transmission	Hydrostatic, infinite ground speeds		
Final Drive	Automotive differential in cast iron carrier. Ring gear & pinion on tapered roller bearings. 1" axle.		
Clutch	None		
Engine to Transmission	Drive shaft, no belts		
Power Take-Off Clutch	Electric front PTO (2000 RPM) Rear PTO (Optional)		
ELECTRICAL SYSTEM			
Charging System	12.5 AMP alternator, regulated	20 AMP alternator, regulated	
Ignition	Compression	12 Volt battery	
Safety	Seat safety switch, no cut in reverse switch standard		
OPERATION			
Power Steering	Standard		
Lift	Hydraulic lift standard – operates center, front, rear attachments		
Hitch	Category "O" 3 point optional		
Brake	Dual external disc with dual pedal control		
Starting	Drive line disconnect	Optional	
CONSTRUCTION			
Frame	Full length C shaped twin channel steel frame		
Front Axle	Cast iron with greasable spindles & center pivot, 1" axle to wheels with inner & outer ball bearings		
Super Structure	All steel hood, side sheets and fenders		
MOWER DECK			
Cutting Widths	50" or 60" optional		
Suspension	Semi-floating with 4 point parallel linkage		
Anti-Scalp	4 anti-scalp gauge wheels, 1 roller on 50" deck. Two anti-scalp gauge wheels on 60" deck		
CAPACITIES			
Fuel Tank	4 gallons		
Engine Oil	6.2 pints	3.88 pints	3.5 pints
DIMENSIONS			
Operating Weight	976 lbs. (w/50" deck)	985 lbs. (w/50" deck)	1088 lbs. (w/60" deck)
Tires Front/Rear*	18" x 8.50"-10" (2 ply) / 26" x 12"-12" (2 ply)		
Rear Tread Width	43"		
Overall Length	78.5"		
Overall Width w/Deck	59" (50" deck)		75" (60" deck)
Height at Steering Wheel	47.6"		
WARRANTY	2 YEAR LIMITED RESIDENTIAL WARRANTY / 1 YEAR LIMITED COMMERCIAL WARRANTY		

* High Flotation Turf Tread standard, Bar Tread optional.
Specifications subject to change without prior notice or obligation.

MODEL	1204	1210	1211	1806	1810	1811
POWER						
Make	Kohler 12 H.P., 1 cylinder			Kohler 18 H.P., 2 cylinder		
Cooling	Air					
Lubrication	Splash			Pressurized direct with automotive pump and filter, with oil sentry		
Block	Cast iron			Aluminum crankcase with removable cast iron cylinder barrels		
Fuel	Regular or unleaded gasoline					
POWER TRAIN						
Transmission	4 speed transaxle	Hydrostatic infinite ground speed		6 speed manual	Hydrostatic, infinite ground speeds	
Final Drive	Automotive differential in cast iron carrier. Ring gear and pinion on tapered roller bearings, 1" axle.					
Clutch	Belt idler	None		Automotive dry disc	None	
Engine to Transmission	V-belt	Drive shaft, no belts				
PTO	Front electric PTO clutch					
ELECTRICAL SYSTEM						
Charging System	15 Amp regulated					
Ignition	12 Volt solid state					
Safety	Seat safety switch, no cut in reverse switch standard					
OPERATION						
Steering	Greaseable, enclosed gear and cam					
Steering Ratio	3 turns stop-to-stop					
Lift	Mechanical		Hydraulic	Mechanical		Hydraulic
Hitch	Sleeve hitch (optional)		Category "O" 3 point hitch (optional)			
Brake	Single ext. disc	Dual external disc				
CONSTRUCTION						
Frame	Full-length, C-shaped twin channel steel frame					
Front Axle	Cast iron with greaseable spindles & center pivot, 1" axle to wheels w/inner & outer ball bearings					
Super Structure	All steel hood, side sheets and fenders					
MOWER DECK						
Cutting Width	38", 44" or 50" optional					
Suspension	Semi-floating with 4 point parallel linkage					
Anti-scalp	4 anti-scalp gauge wheels, 1 roller on 44" & 50" decks. Roller & anti-scalp runners on 38" deck					
CAPACITIES						
Fuel Tank	4 gallons					
Engine Oil	3 pints			3.88 pints with oil & filter		
DIMENSIONS						
Operating Weight	736 lbs.	788 lbs.		778 lbs.	796 lbs.	800 lbs.
Tires - Front/Rear	16" x 16.50"-8 (2 ply) / 23" x 10.50"-12 (2 ply)					
Rear Tread Width	39"					
Wheelbase	44"					
Overall Length	72"					
Overall Width (without deck)	38"					
Height at Steering Wheel	42"					
WARRANTY						
2 YEAR LIMITED RESIDENTIAL WARRANTY / 1 YEAR LIMITED COMMERCIAL WARRANTY						

Specifications subject to change without prior notice or obligation.



All specifications and designs are subject to change without prior notice or obligation.

P.O. Box 36930
Cleveland, Ohio 44136